





SOLIDFORMS
CORPORATION

**BUILD A
SOLID FUTURE!**



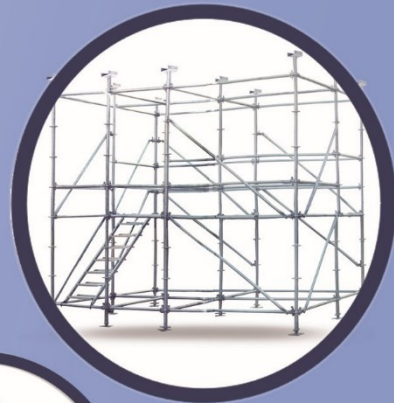

VISION

We are a top choice provider of specialized, quality CONSTRUCTION MATERIALS and TECHNICAL BUILDING SOLUTIONS in the PHILIPPINES.



MISSION

- **For our Customers:** We guarantee total satisfaction by providing quality products and solutions, towards lasting business relationship.
- **For our Employees:** We promote their well being, help them achieve professional growth and maximum work productivity through continuous learning and training.
- **For our Shareholders:** We ensure optimum profitability and sustainability through efficient utilization of our resources and opportunities.
- **For our Environment:** We support nation building with the proper use and care of natural resources for the welfare of current and future generations.

CORE VALUES



Integrity

We live out the highest standards of professionalism and uphold our commitment to our stakeholders.



Creativity

We constantly innovate and collaborate with our local and global partners to provide our customers with the right products and solutions.



Advancement

We empower our people to grow and develop professionally, individually and as a team.



Resiliency

We always rise above our challenges, wiser, stronger and with greater confidence.



Excellence

We continue to learn, use leading edge technology and implement quality standards in our products and solutions.





Corporate Profile

SolidForms Corporation (SFC) was established on September 06, 2017 with Securities and Exchange Commission Registration No. CS201729918. Our primary business is trading (importation, selling and distribution) of formworks; scaffolding and access; phenolic boards; and pipes, fittings and related accessories. We also provide engineering design and technical support services for our formworks clients.

At SFC's helm is Mr. Norman V. Montaner, Chairman & President, with more than 30 years of work experience and expertise in the field of construction, design, and commercial trading of building materials and related accessories. Before co-founding SFC, he headed the local branch of a multinational formworks company and was involved in major real estate developments in the country. Since its establishment, he has assertively led SFC, making our reputation as a dependable provider of quality construction materials and solutions for the industry.

Holding key posts are seasoned sales and technical support engineers and corporate practitioners, and highly trained personnel, who ensure quality and timely delivery of our products and service commitments.

SFC is an emerging leader in the industry. Our top clients are one of the leading Developers and Construction companies in the country today. In 2018, SFC became a distributor in the Philippines of products and solutions of ULMA C y E.S. Coop, one of the leading formworks and engineering services providers worldwide.

Strongly supportive of nation building, SFC helps build a Solid Future!



Table of Contents

Decking System	2
Floor Props & Folding Tripod	
Aluminum Beams	
T-Form System	3
Basic Components	
Frame System	4
Ringlock System	5
Components	
Sizes (Standard Post, Ledger, Diagonal Brace)	
Accessories	8
Base Jack, U-head, 360° Swivel Clamp, Fixed Clamp	
G.I. Pipes	
Aluminum Panel Form	9
Home Building System	
Application	
Components	
Accessories	
Column Form System	10
Wall Form System	13
SolidPly & EcoPly Phenolic Boards	14
On-going Projects	15
Completed Projects	16

Floor Props & Folding Tripod

Three kinds of Floor Props:

- Outer tube $\Phi 60$ with inner tube $\Phi 48$ (60/48)
- Outer tube $\Phi 75$ with inner tube $\Phi 60$ (75/60)
- Outer tube $\Phi 88.5$ with inner tube $\Phi 75.5$ (88.5/75.5)

Uses

- Mainly for slabs and beams.

Advantages

- Easy to assemble and disassemble
- Convenient to store and to transport



Aluminum Beams

Uses

- For floor and ceiling joists to reinforce structure strength

Advantages

- Versatile and multiple applications on slab, columns, beams and for walls
- Light weight, heat-treatable and easy to weld
- High strength



T-Form System

Applications

- Mainly for beam and slab support


Advantages

- Easy to assemble and dismantle
- Minimal manpower required 3-4 workers only
- Efficient solutions for infill zones, beams, shear wall and dropping slab area.



Basic Components (Early Stripping Formworks System)

T-Form Panel
components: steel frame & phenolic board 12mm

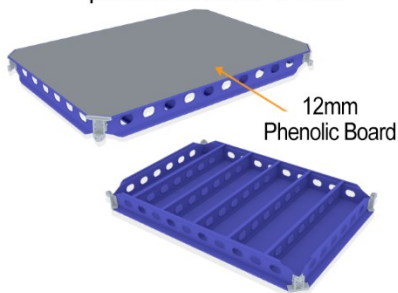


Steel Prop with Drophead




Extension Range		Max. Permit Load Capacity	
m	feet	kN	lbs
4.0	13'1"	20.00	4500
3.8	12'5"	20.00	4500
3.6	11'9"	20.00	4500
3.4	11'1"	20.76	4670
3.2	10'5"	23.44	5270
3.0	9'10"	26.67	5995
3.5	11'5"	20.00	4500
2.8	9'2"	30.61	6880
2.6	8'6"	35.00	7870
2.4	7'10"	35.00	7870
2.2	7'2"	35.00	7870

60/48.3 Steel Prop 2.2~4.0m telescopic

Beam Bracket




Brace Gate



Cantilever Anchor



Cantilever Connector



Cantilever Prop



Drophead



Half-Support Head



Jack Head



Side Deck Edging



Side Filler Edging



Sub-Drophead




Telescopic Lintel



T-form Formwork Unit



T-form Erection Required Tools

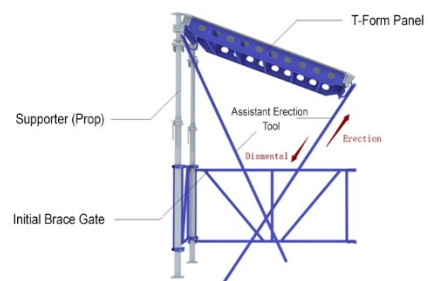

Frame System



Cross Brace

SIZE	MAIN PIPE	WEIGHT (Kg)
1219(4') x 1829(6')	Ø21.3 x 1.4	3.1
	Ø25.4 x 1.5	3.95



A-Frame

SIZE (WxH)	MAIN PIPE	WEIGHT	MAIN PIPE	WEIGHT	MAIN PIPE	WEIGHT
1219(4') x 1700(5'7")		12.73kg		13.59kg		14.45kg
1219(4') x 1930(6'4")	Ø42 x 1.8	13.85kg	Ø42 x 2.0	14.80kg	Ø42 x 2.2	15.74kg
1219(5') x 1700(5'7")	Ø25 x 1.5	13.54kg	Ø25 x 1.5	14.46kg	Ø25 x 1.5	15.37kg
1219(5') x 1930(5'7")		14.66kg		15.67kg		16.67kg




H-Frame

SIZE (WxH)	MAIN PIPE	WEIGHT	MAIN PIPE	WEIGHT	MAIN PIPE	WEIGHT
1219(4') x 1700(5'7")		12.56kg		13.65kg		14.73kg
1219(4') x 1930(6'4")	Ø42 x 1.8	13.54kg	Ø42 x 2.0	14.70kg	Ø42 x 2.2	15.87kg
1524(5') x 1700(5'7")	Ø25 x 1.5	13.91kg	Ø25 x 1.5	15.12kg	Ø25 x 1.5	16.31kg
1524(5') x 1930(5'7")		14.89kg		16.81kg		17.45kg

Stair Case





Catwalk

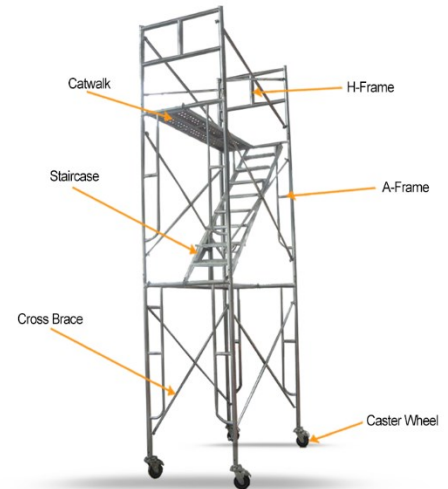





Width x Length x Height	Weight
W450* 2677mm (L1829*H1955mm)	25.55kg
W450* 2515mm (L1829*H1725mm)	23.34kg
W450* 2370mm (L1500*H2000mm)	23.31kg
W450* 2828.4mm (L2000*H2000mm)	26.18kg
W1000* 2690.7mm (L1800*H2000mm)	52.02kg
W1000* 2828mm (L2000*H2000mm)	52.59kg

Width x Height x Thickness x Length	Weight
210 x 45 x 1.5 x 1800mm	8.8kg
210 x 45 x 1.5 x 2000mm	9.7kg
210 x 45 x 1.5 x 2400mm	11.4kg
210 x 45 x 1.5 x 900mm	5.3kg
240 x 45 x 1.5 x 1200mm	6.6kg
240 x 45 x 1.5 x 1500mm	8.1kg
250 x 50 x 1.5 x 1500mm	9.0kg
250 x 50 x 1.5 x 1800mm	10.5kg
250 x 50 x 1.5 x 2000mm	11.4kg
300 x 50 x 1.5 x 600mm	5.2kg
300 x 50 x 1.5 x 1200mm	7.9kg
300 x 50 x 1.5 x 1829mm	11.7kg
420 x 45 x 1.2 x 1500mm	11.4kg
420 x 45 x 1.2 x 2000mm	14.7kg
420 x 45 x 1.2 x 1829mm	13.6kg
450 x 45 x 1.2 x 1829mm	13.5kg
480 x 45 x 1.2 x 900mm	7.8kg
480 x 45 x 1.2 x 1200mm	9.9kg
480 x 45 x 1.2 x 1500mm	12.7kg
500 x 50 x 1.2 x 1500mm	13.7kg
500 x 50 x 1.2 x 1800mm	16.2kg
500 x 50 x 1.2 x 1829mm	15.3kg

Ringlock System

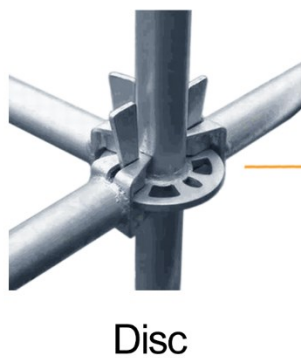

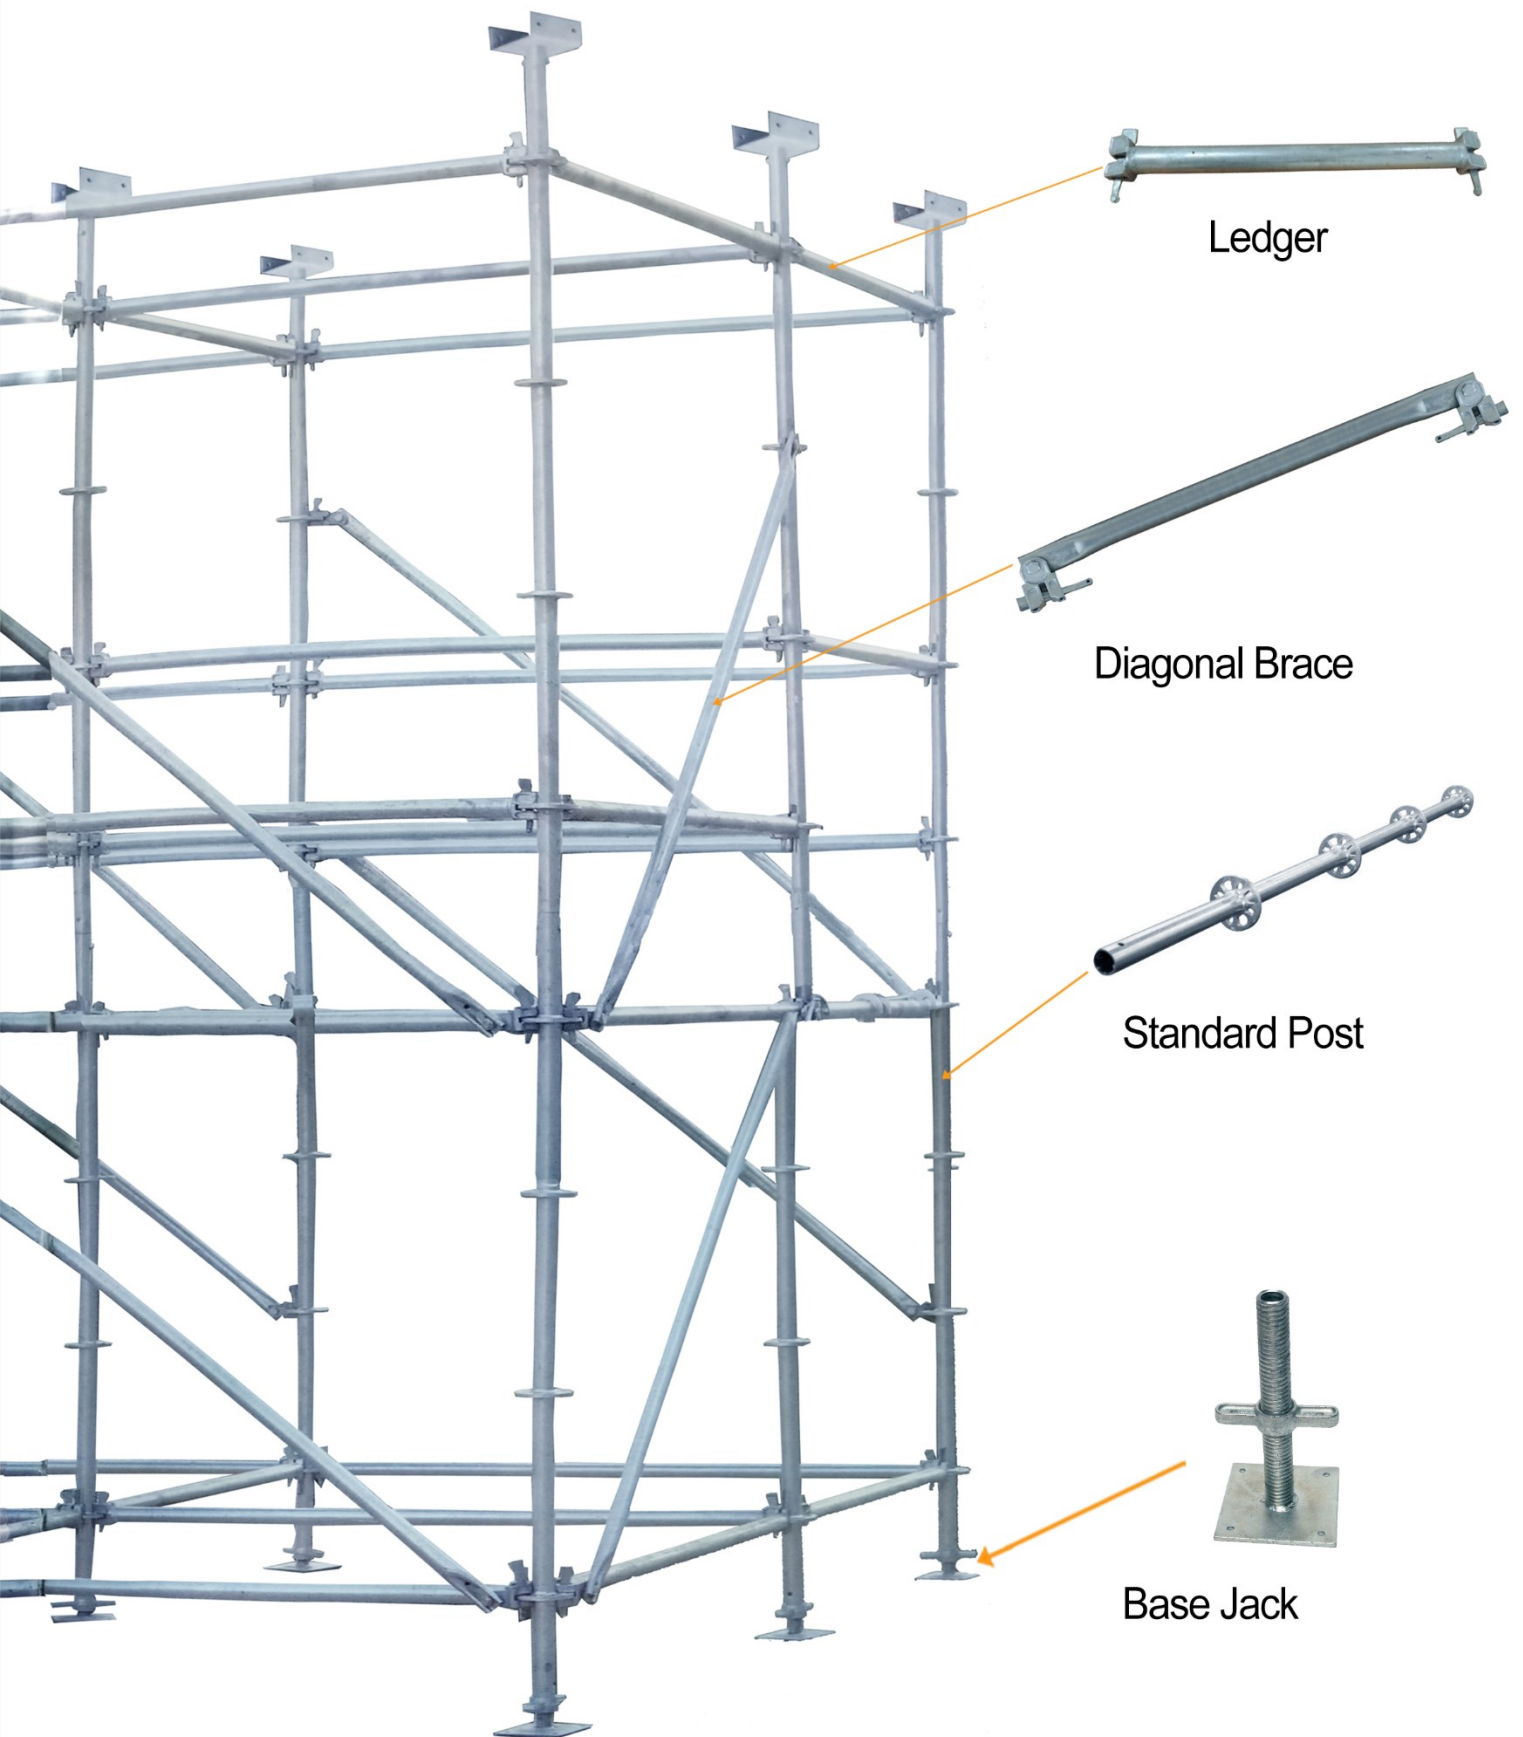

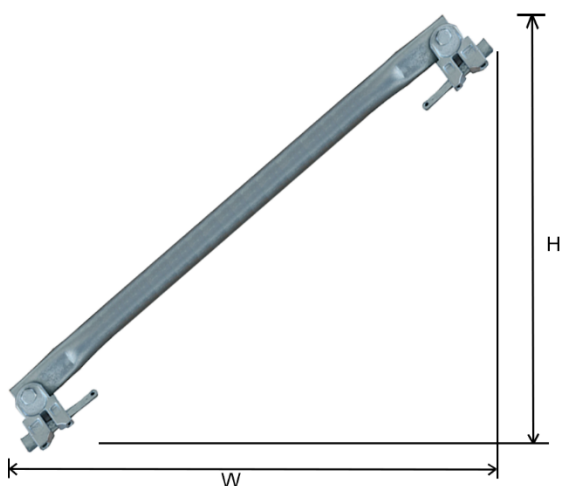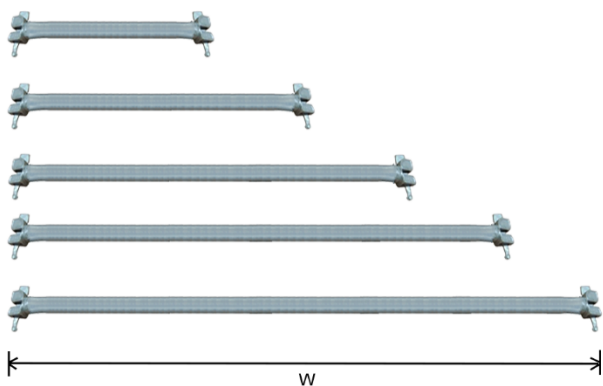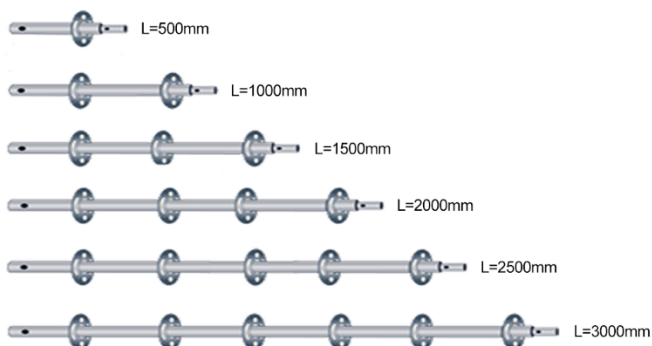

Standard Post

Size	Main Pipe	Weight (Kg)
500mm		3.03
1000mm		5.43
1500mm	Ø48.3 x 3.2	7.82
2000mm		10.22
2500mm		12.61
3000mm		15.00

Ledger

Size	Main Pipe	Weight (Kg)
300mm		1.65
600mm		2.55
900mm		3.45
1200mm		4.35
1500mm		5.24
1800mm	Ø48.3 x 2.5	6.14
2000mm		6.74
2100mm		7.04
2400mm		7.94
2700mm		8.84
3000mm		9.73

300mm		1.58
600mm		2.36
900mm		3.13
1200mm		3.91
1500mm		4.68
1800mm	Ø42 x 2.5	5.46
2000mm		5.97
2100mm		6.23
2400mm		7.00
2700mm		7.78
3000mm		8.55


Diagonal Brace

Size	Main Pipe	Weight (Kg)
900x1500		5.85
1200x1000		5.36
1200x1500		6.29
1500x1000		5.98
1500x1500		6.81
1800x1000	Ø42 x 2.5	6.65
1800x1500		7.38
2100x1000		7.33
2100x1500		8.00
2400x1000		8.04
2400x1500		8.64

900x1500		4.79
1200x1000		4.41
1200x1500		5.13
1500x1000		4.89
1500x1500		5.53
1800x1000	Ø33 x 2.5	5.40
1800x1500		5.97
2100x1000		5.94
2100x1500		6.44
2400x1000		6.48
2400x1500		6.94

Accessories

Name	Size (mm) OD & Length	Base Plate (mm)
Base Jack	28/30/32/34/38 * (400 - 1000)	120*120*(3.5-8)
		140*140*(3.5-8)
		150*150*(3.5-8)
U-Head	28/30/32/34/38 * (400 - 1000)	150*120*50*(3.5-8)
		150*150*50*(3.5-8)
		180*150*50*(3.5-8)
		130*170*50*(3.5-8)

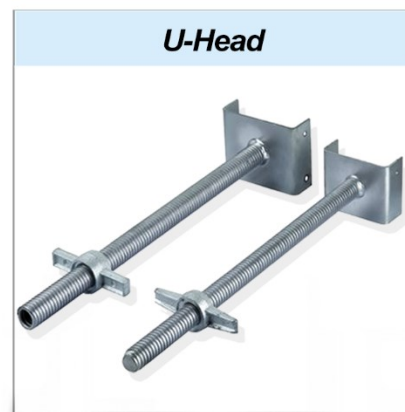

G.I. PIPES

Name	Size & Length
G.I.Pipe Sch. 20	1 1/2" 10.39kgs @ 6m length
G.I.Pipe Sch. 40	1 1/2" 14.36kgs @ 6m length
	1 1/2" 16.30kgs @ 6m length




Aluminum Panel Form Home Building System



Wall Application



Columns & Beams Application

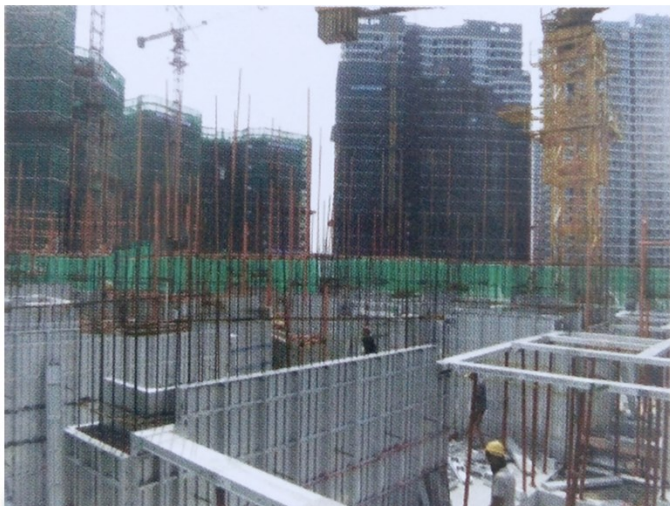

Walls w/ Pilasters Application



Slabs & Beams Application



Walls & Staircase Application




Rebars Assembly

Aluminum Panel Form Application



Aluminum Panel Form Components


Angle Bar

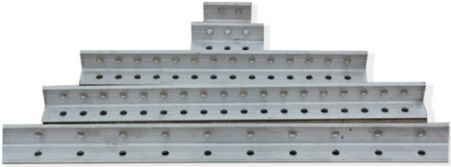

Beam Slab Arch



End Beam



**End of Wall Panel
Panel Cover**



Inner Corner



Joint Bar



Kicker Panel



Middle Beam



Pre-Embedded Box



Prop Head



Prop Tube and Prop Base



Push Pull Prop Head



Wall Panel



Accessories





Flat Tie



Round Pin & Wedge Pin

Column Form System

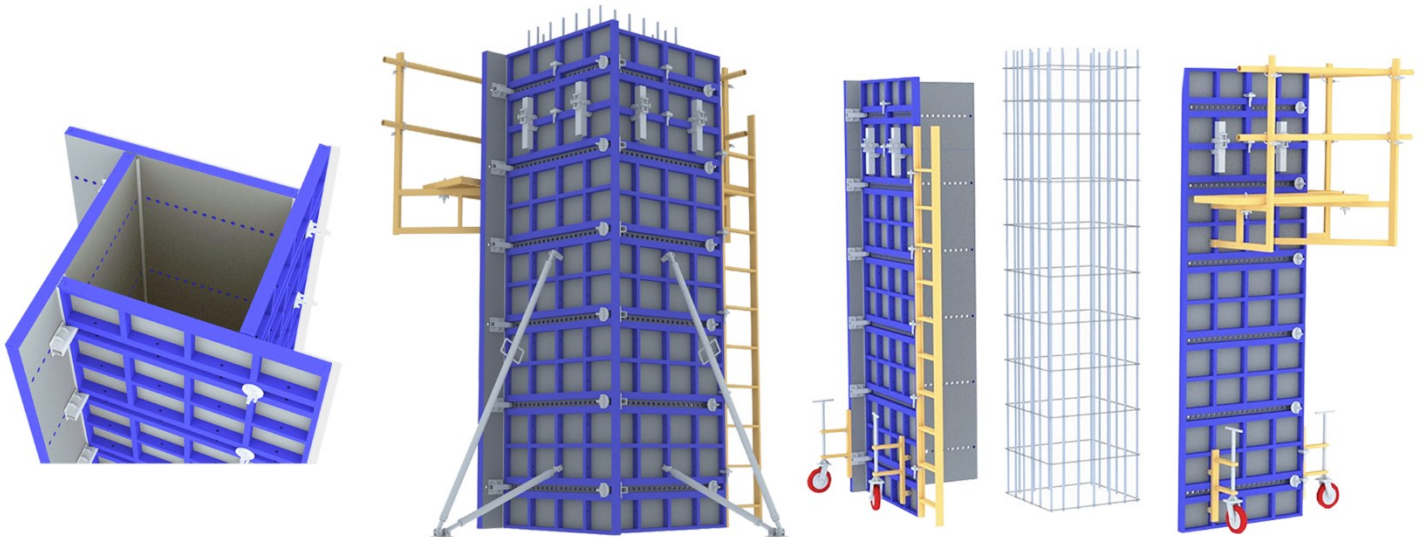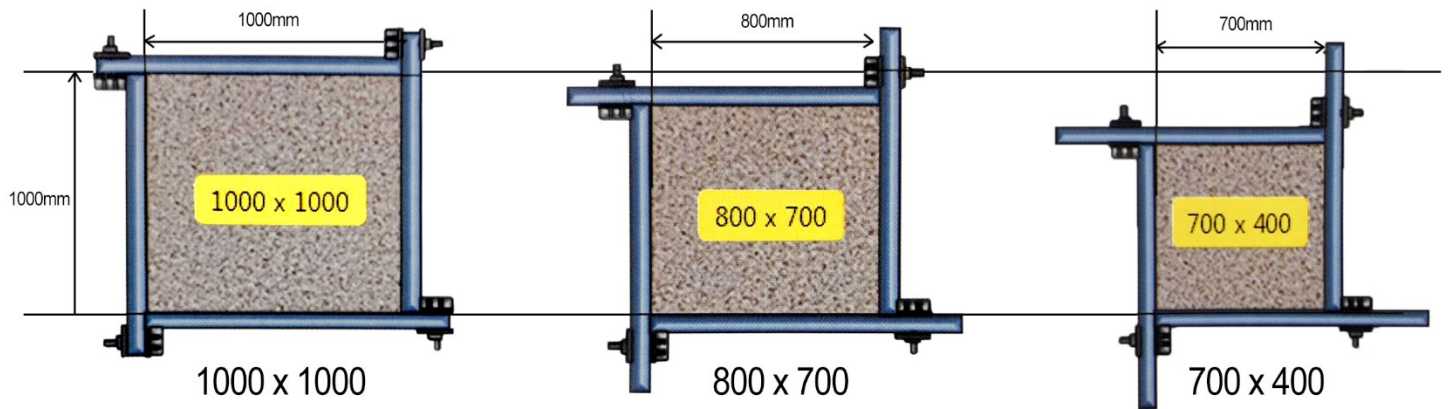

Size adjustable for different column dimensions



Wall Form System




Phenolic Boards


Uses

- Concrete formworks for slabs, beams and columns
- Undersheeting for roof tiles and asphalt shingles
- Framing of cabinets

Advantages

- Easy to remove. Concrete does not stick on phenolic board
- Reusable, multiple usage
- Leaves smooth concrete finish, saves on plastering


BRAND	 SOLIDPLY PHENOLIC BOARDS		
PRODUCT			
DIMENSION	1220mm x 2440mm (4' x 8')		
THICKNESS	18mm (3/4") Gold	18mm (3/4") Platinum	12mm (1/2") Platinum
TOLERANCE	+/-0.5mm	+/-0.5mm	+/-0.2mm
CORE MATERIALS	Finger Joint	Full Core	Full Core
NO. OF PLYS	11 Plys	11 Plys	7 Plys
SURFACE FINISH	Smooth	Smooth	Smooth
GLUE	Melamine WBP	Melamine WBP	Melamine WBP
EDGE	Black Water Proof Paint	Black Water Proof Paint	Black Water Proof Paint
FILM	Black Film	Black Film	Black Film
MOISTURE CONTENT	10% - 12%	10% - 12%	10% - 12%
USAGE (Theoretical)	Up to 4-6 Times	Up to 6-8 Times	Up to 7 Times

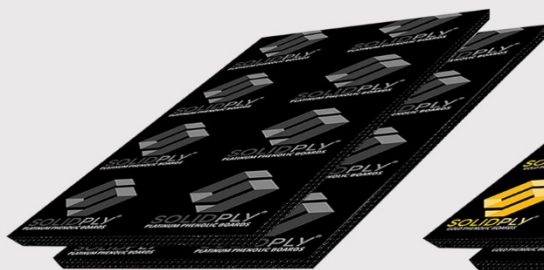

18mm Platinum (3/4")




18mm Gold (3/4")

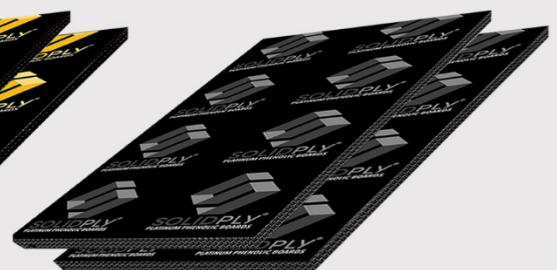

12mm Platinum (1/2")



18mm EcoPLY (3/4")

BRAND	 ECOPLY
PRODUCT	
DIMENSION	1220mm x 2440mm (4' x 8')
THICKNESS	18mm (3/4")
TOLERANCE	+/-0.5mm
CORE MATERIALS	Finger Joint
NO. OF PLYS	11 Plys
SURFACE FINISH	Smooth
GLUE	Melamine WBP
EDGE	Black Water Proof Paint
FILM	Black Film
MOISTURE CONTENT	10% - 12%
USAGE (Theoretical)	Up to 1-2 Times



Ongoing Projects



MACTAN PLAINS RESIDENCES



BLOOM RESIDENCES



MALDIVES ASPIRE - Bldg. A



PALM ESTATE - Amber Model



FUTURA EAST BLDG. A 5




FUTURA EAST BLDG. B 6



PANGLAO BLDG. DALOY



BALI OASIS BLDG. MALANG

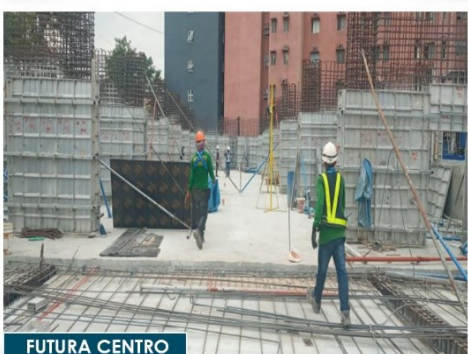

FUTURA CENTRO



BELIZE BLDG. AZUL

Completed Projects



CEBU-CORDOVA LINK EXPRESSWAY



PANGLAO OASIS - Bldg. Bughaw




ALTA SPATIAL - Bldg. Banyan



ALTA SPATIAL - Bldg. Acacia



VERDE SPATIAL

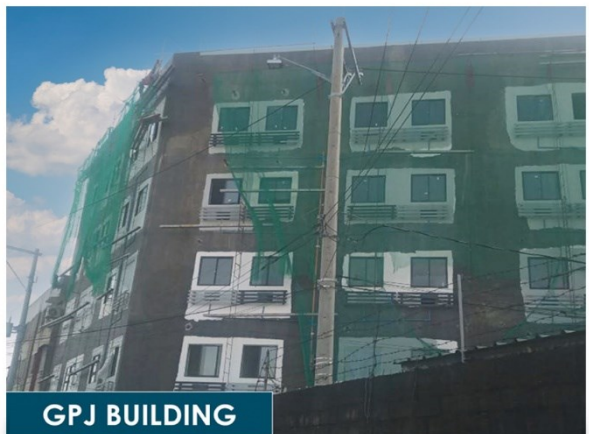

GPJ BUILDING

HEAD OFFICE

Unit 47, L.A. Townhomes, M. Concepcion Avenue,
Brgy. Buting, Pasig City 1600
+63 917 545 1000
+63 2 8293 7000

MAIN WAREHOUSE

Blk 8, Lot 11, Cavite Light Industrial Park,
Brgy. Maguyam, Silang, Cavite 4118
+63 917 637 0275

MANUFACTURING

Blk 3, Lot 10, Cavite Light Industrial Park,
Brgy. Maguyam, Silang, Cavite 4118
+63 917 864 8237
+63 46 481 6499

VISMIN OFFICES & WAREHOUSES

CEBU

Warehouse 9, Purok Molave, Brgy. Tayud,
Liloan, Cebu 6002
+63 917 771 8237
+63 32 344 4456


DAVAO


Purok 26, Caimito St., Ma-a Riverside Road,
Brgy. Ma-a, Davao City 8000
+63 917 621 9264
+63 082 285 7689

CAGAYAN DE ORO

Zone 1, Villarin St., Carmen,
Cagayan de Oro City 9000
+63 917 875 1780
+63 088 856 2291

www.solidforms.com.ph

 **@SFCsolidformscorp**

 **@SFCsolidformscorp**

Copyright 2022 - All rights reserved
May 2022


Vol. 053122





SOLIDFORMS
CORPORATION

**BUILD A
SOLID FUTURE!**

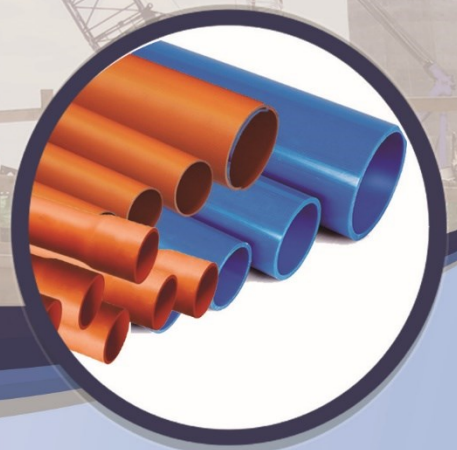



VISION

We are a top choice provider of specialized, quality CONSTRUCTION MATERIALS and TECHNICAL BUILDING SOLUTIONS in the PHILIPPINES.



MISSION

- **For our Customers:** We guarantee total satisfaction by providing quality products and solutions, towards lasting business relationship.
- **For our Employees:** We promote their well being, help them achieve professional growth and maximum work productivity through continuous learning and training.
- **For our Shareholders:** We ensure optimum profitability and sustainability through efficient utilization of our resources and opportunities.
- **For our Environment:** We support nation building with the proper use and care of natural resources for the welfare of current and future generations.

CORE VALUES



Integrity

We live out the highest standards of professionalism and uphold our commitment to our stakeholders.



Creativity

We constantly innovate and collaborate with our local and global partners to provide our customers with the right products and solutions.



Advancement

We empower our people to grow and develop professionally, individually and as a team.



Resiliency

We always rise above our challenges, wiser, stronger and with greater confidence.



Excellence

We continue to learn, use leading edge technology and implement quality standards in our products and solutions.





Table of Contents

Pipes & Fittings	4
UPVC Sanitary Piping System	
UPVC Pipes Electrical Conduit	
Portable Water UPVC Sanitary Piping System	
PPR Pipes	
HDPE Pipes	
 Door Locksets & Accessories	 9
Lockset	
Lever Sets	
Gateman I Door Solution	
Lockset Accessories	
Lever Sets Accessories	
Padlocks	
Digital Door Locks	

UPVC Sanitary Piping System (unPlasticized Polyvinyl Chloride)


Size Specifications

SANITARY UPVC PIPES S-600

2"	3m
3"	3m
4"	3m
6"	3m

SANITARY UPVC PIPES S-1000

2"	3m
3"	3m
4"	3m
6"	3m
8"	3m

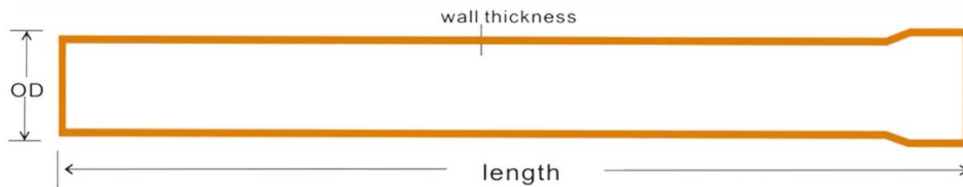

PNS 1950 SANITARY PIPE

Size (inch)	Series	Tolerance				Length		
		Outside Diameter (mm)	Ovality (mm)	Wall Thickness	Tolerance (mm)	Cutting Length (mm)	Hub Length (mm)	After Hubbing (mm)
2"	1000	57.0 + 0.15	+0.8	2.54	+0.076	3020	55	3015
3"	1000	82.0 + 0.20	+0.9	3.75	+0.100	3030	70	3025
4"	1000	107.1 + 0.22	+0.14	3.81	+0.100	3040	85	3035
6"	1000	160 + 0.40	+2.0	4.7	0.117	3050	90	3045
8"	1000	200 + 0.06	+2.0	5.4	0.120	3050	90	3045
2"	600	57.0 + 0.15	+0.8	1.85	+0.055	3020	55	3015
3"	600	82.0 + 0.20	+0.9	2.54	+0.076	3030	70	3025
4"	600	107.06 + 0.22	+0.14	2.54	+0.076	3040	85	3035
6"	600	160 + 0.4	+2.0	4.0	+0.117	3040	85	3045

Size Specifications

EXCELL UPVC PIPES S-10

2"	3m
3"	3m
4"	3m
6"	3m
8"	3m

FITTINGS

Elbow 90°



Elbow 45°



Tee



Wye



Clean Out Set



Coupling



P-Trap w/ Plug



Wye Reducer



Tee Reducer




Bushing Reducer



UPVC Pipes Electrical Conduit (unPlasticized Polyvinyl Chloride)

Size Specifications

1/2"	(20mm)
3/4"	(25mm)
1"	(32mm)
1-1/4"	(40mm)
1-1/2"	(50mm)
2"	(63mm)

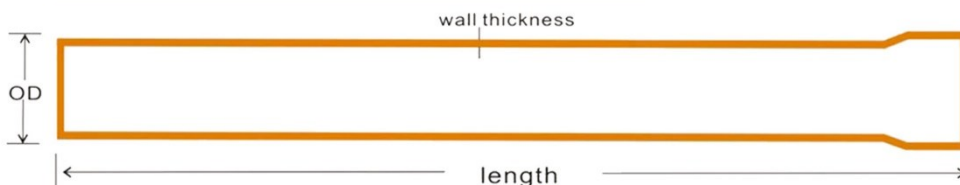

PNS 14 THINWALL

SIZE (inch)	Tolerance		Wall Thickness		Length		
	Mean Outside Diameter	Max-Min Ovality (mm)	Wall Thickness (mm)	Tolerance (mm)	Cutting Length (mm)	Hub Length (mm)	After Hubbing (mm)
1/2" (20 mm)	+ 0.2 mm	+ 0.5 mm	1.5 mm	+ 0.045 mm	3005	30 mm	3000 mm
3/4" (25 mm)	+ 0.2 mm	+ 0.5 mm	1.5 mm	+ 0.045 mm	3005	30 mm	3000 mm
1" (32 mm)	+ 0.2 mm	+ 0.5 mm	1.5 mm	+ 0.045 mm	3005	35 mm	3000 mm
1 1/4" (40 mm)	+ 0.2 mm	+ 0.5 mm	1.5 mm	+ 0.045 mm	3005	35 mm	3000 mm
1 1/2" (50 mm)	+ 0.2 mm	+ 0.6 mm	1.5 mm	+ 0.045 mm	3005	50 mm	3000 mm
2" (63 mm)	+ 0.2 mm	+ 0.8 mm	1.5 mm	+ 0.045 mm	3005	55 mm	3000 mm

PNS 14 THICKWALL

SIZE (inch)	Tolerance		Wall Thickness		Length		
	Mean Outside Diameter	Max-Min Ovality (mm)	Wall Thickness (mm)	Tolerance (mm)	Cutting Length (mm)	Hub Length (mm)	After Hubbing (mm)
1/2" (20 mm)	+ 0.2 mm	+ 0.5 mm	2.2 mm	+ 0.045 mm	3005	30 mm	3000 mm
3/4" (25 mm)	+ 0.2 mm	+ 0.5 mm	2.3 mm	+ 0.045 mm	3005	30 mm	3000 mm
1" (32 mm)	+ 0.2 mm	+ 0.5 mm	2.4 mm	+ 0.045 mm	3005	35 mm	3000 mm
1 1/4" (40 mm)	+ 0.2 mm	+ 0.5 mm	2.4 mm	+ 0.045 mm	3005	35 mm	3000 mm
1 1/2" (50 mm)	+ 0.2 mm	+ 0.6 mm	2.4 mm	+ 0.045 mm	3005	50 mm	3000 mm
2" (63 mm)	+ 0.2 mm	+ 0.8 mm	2.5 mm	+ 0.045 mm	3005	55 mm	3000 mm

FITTINGS

Elbow



Tee



Coupling



Male Adapter with Locknut



Male Adapter



Locknut for Male Adapter



Pipe Connector



Flexible Connector



Long Elbow



Mini Long Elbow




PVC Clamp (Orange & Blue)




Portable Water uPVC Sanitary Piping System

Size Specifications



1/2"	(20mm)
3/4"	(25mm)
1"	(32mm)
1-1/4"	(40mm)
1-1/2"	(50mm)
2"	(63mm)

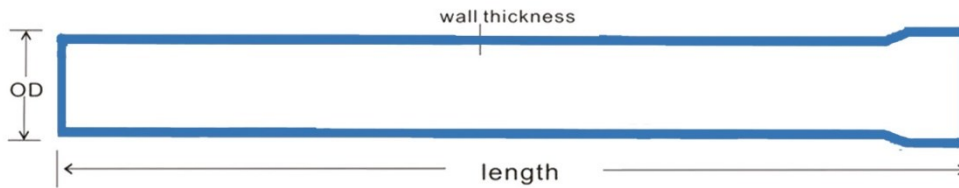

PNS 65 POTABLE WATER						
NOMINAL OUTSIDE DIAMETER	Tolerance		Wall Thickness		Cutting Length	Hub Length
	Mean Outside Diameter	Max-Min on Ovality	Wall Thickness	Tolerance		
1/2" (20 mm)	+ 0.2 mm	+ 0.5 mm	1.8 mm	+ 0.38 mm	3035	25 mm
3/4" (25 mm)	+ 0.2 mm	+ 0.5 mm	1.9 mm	+ 0.39 mm	3035	25 mm
1" (32 mm)	+ 0.2 mm	+ 0.5 mm	2.0 mm	+ 0.40 mm	3040	30 mm
1 1/4" (40 mm)	+ 0.2 mm	+ 0.5 mm	2.3 mm	+ 0.43 mm	3045	30 mm
1 1/2" (50 mm)	+ 0.2 mm	+ 0.6 mm	2.9 mm	+ 0.49 mm	3050	45 mm
2" (63 mm)	+ 0.2 mm	+ 0.8 mm	3.6 mm	+ 0.56 mm	3060	50 mm

FITTINGS

Elbow



Tee



Male
Adaptor



Female
Adaptor




Coupling



U. Patente



Threaded
Tee



Threaded
Elbow




Coupling
Reducer



Elbow
Reducer



End Cap



Plug



Ball Valve



PPR PIPES | TY & IIL (Polypropylene Random Copolymer)



S. No.	Item Code	Size & Thickness
1	PP20-4-PN16/G1	20x2.8 mm
2	PP25-4-PN16/G1	25x3.5 mm
3	PP32-4-PN16/G1	32x4.4 mm
4	PP40-4-PN16/G1	40x5.5 mm
5	PP50-4-PN16/G1	50x6.9 mm
6	PP63-4-PN16/G1	63x8.6 mm
7	PP75-4-PN16/G1	75x10.3 mm
8	PP90-4-PN16/G1	90x12.3 mm
9	PP110-4-PN16/G1	110x15.1 mm

Item No.	Item Code	Size & Thickness
1	PP20-4-PN20/G1	20x3.4 mm
2	PP25-4-PN20/G1	25x4.2 mm
3	PP32-4-PN20/G1	32x5.4 mm
4	PP40-4-PN20/G1	40x6.7 mm
5	PP50-4-PN20/G1	50x8.3 mm
6	PP63-4-PN20/G1	63x10.5 mm
7	PP75-4-PN20/G1	75x12.5 mm
8	PP90-4-PN20/G1	90x15 mm
9	PP110-4-PN20/G1	110x18.3 mm

FITTINGS

Socket



End Cap



Reducer
Socket



Tee
(Equal)



Reducing
Tee



Elbow 90°



Elbow 45°



Plastic
Clamp



Pressure Test
Plug



Male Transition
Elbow 90°



Female Transition
Elbow 90°



Male
Transition Tee



Female
Transition Tee



Male Transition
Socket



Female
Transition Socket



Ball
Valve



Stop Globe
Valve w/ Body



Plastic
Union



Union Male
Adaptor



Union Female
Adaptor



Male Transition
Socket



HDPE PIPES

(High Density Polyethylene Pipes)

SPECIFICATIONS

DN/OD: 20mm - 1600mm

Standards: ISO4427, AS/NZS4130, DIN8074, GB/T13663-2000

Materials: PE100 or PE80


Color: Black

Fittings Offered: All

OEM/ODM: Yes

ADVANTAGES

- Convenient for construction and Installation
- Non-toxic
- No Leakage
- Corrosion Resistant
- Longevity of Work Life

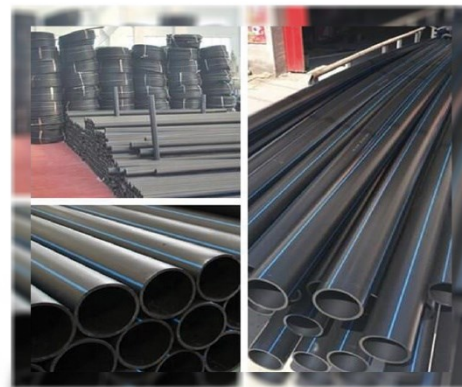

SPECIFICATIONS

DN/OD: 75mm - 900mm

Materials: PE100, UHMWPE

Color: Black

Fittings offered: HDPE stub end, Anti-corrosion steel flange with bolts & nuts, Rubber blanket, PE floater, Rubber hose etc.

OEM/ODM: Yes

ADVANTAGES

- Anti abrasive, anti-aging, UV-resistant, corrosion resistant & long service life.
- No breaking, no dripping, good velocity of flow to ensure the high transportation efficiency
- Easy to assemble and disassemble



SPECIFICATIONS

DN/OD: 20mm - 630mm

Standard: ISO4437, EN1555, GB/T1558

Materials: PE100, PE80

Color: Black

Fittings offered: All

OEM/ODM: Yes

ADVANTAGES

- Non-toxic
- Corrosion Resistant
- Convenient for construction
- No Leakage
- High Toughness
- Low System Cost



SPECIFICATIONS

DN/OD: 160mm - 1200mm

Standards: CJ/T 358 - 2010

Materials: PE100


Color: Black, or as client's requirement

Fittings Offered: All

OEM/ODM: Yes

ADVANTAGES

- Excellent Flexibility and Strong Toughness
- Anti-Abrasive, Anti-aging, Corrosion Resistant, Long Service Life
- No Breaking, No Dripping, Good Velocity of Flow to Ensure the
- High Transportation Efficiency
- Better Resistance to Concussion capability than Steel Pipes

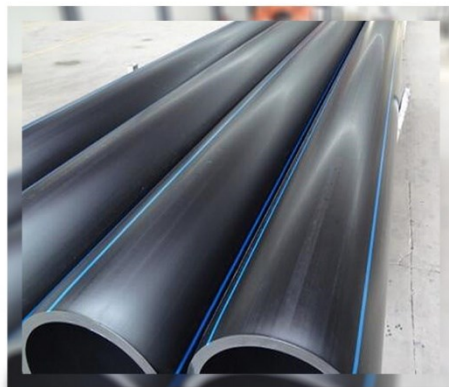

DOOR LOCKSETS & ACCESSORIES

LOCKSETS

Essential Series I Cylindrical Knobsets

Product Specification

Standard	ANSI / BHMA A 156.2 2003
Testing Cycles	Tested up to 100,000 cycles
Materials	Chassis: Steel Latch and Bolt: Zinc Strike plate and face plate: Satin Nickel (US15) - M/S plated Knob: Stainless Steel 304 Rose: Stainless Steel 201 Lever: Satin Nickel (US15) - Aluminum
Backset	60mm / 70mm
Door Thickness	35mm - 60 mm
Function	Residential applications Function codes: 1 Passage 2 Bathroom function 7 Entrance function
Cylinder	Hollow brass plug and aluminum housing
No. of Keys	3 pcs. of nickel-plated brass key
Finishes	Polished Brass (US3) Antique Brass (US5) Antique Copper (US11) Satin Stainless Steel (US32D)



Essential Series I Cylindrical Lever Sets

Product Specification

Standard	ANSI / BHMA A 156.2 2003
Testing Cycles	Tested up to 200,000 cycles
Materials	Chassis: Steel Latch and Bolt: Zinc Strike plate and face plate: Satin Nickel (US15) - M/S plated Knob: Stainless Steel / Brass Rose: Stainless Steel 304 Lever: Aluminum
Backset	60mm / 70mm
Door Thickness	35mm - 50 mm
Function	Residential applications Function codes: 1 Passage 2 Bathroom function 7 Entrance function
Cylinder	Hollow Brass plug and zinc housing
No. of Keys	3 pcs. of nickel-plated brass key
Finishes	Satin Nickel (US15) Aluminum (US27)



LEVER SETS

VL5300 Series Medium Duty Tubular Leverset

Product Specification

Standard	ANSI / BHMA A 156.2 2003
Testing Cycles	Tested up to 200,000 cycles
Materials	Chassis: Steel Latch and Bolt: Zinc Strike: Steel Knob: Zinc Rose: Brass
Backset	60mm / 70mm
Door Thickness	35mm - 45 mm
Function	Residential and light commercial applications Function codes: 1 Passage 2 Bathroom function 7 Entrance function
Cylinder	Solid Brass 5-pin tumbler cylinder
No. of Keys	3 pcs. of nickel-plated brass key
Finishes	Antique Brass (US5) Satin Nickel(US15)



GATEMAN I DOOR SOLUTION Part of Yale

CYLINDRICAL KNOBSET



Finish	Satin Stainless Steel
Backset	60mm
Door Thickness	35-50mm
Function	Entrance
No. of Keys	3 pcs
Testing Cycles	100,000 Cycles

TUBULAR KNOBSET



Finish	Satin Stainless Steel
Backset	60mm
Door Thickness	35-50mm
Function	Entrance
No. of Keys	3 pcs
Testing Cycles	100,000 Cycles

TUBULAR LEVERSET



Finish	Satin Nickel
Structure Design	Tubular
Backset	60mm
Door Thickness	35-50mm
Function	Entrance
No. of Keys	3 pcs
Testing Cycles	100,000 Cycles

DEADBOLT (Single Cylinder with Thumbturn)



Finish	Satin Stainless Steel
Backset	Adjustable 60-70mm
Door Thickness	35-50mm
Function	Double Cylinder
No. of Keys	3 pcs

BRASS PADLOCK



Size	Brass Body
Model	Hardened Steel
No. of Pins	
-30mm	4 Pins
-40mm	5 Pins
No. of Keys	3 pcs

LOSE PIN PLAIN BEARING HINGES



Hinge Leaf Finish	Stainless Steel
Cycle Test	
-3.0" x 3.0" x 2.0mm	50,000 cycles
-3.5" x 3.5" x 2.0mm	50,000 cycles

DOOR LOCKSETS & ACCESSORIES

LOCKSETS ACCESSORIES

ESSENTIAL SERIES

Magnetic Door Stopper

- Material: Zinc Alloy
- Finishes: Satin Stainless Steel




Dome Door Stopper

- Material: Stainless Steel
- Finishes: Satin Stainless Steel



Wall Door Stopper

- Material: Stainless Steel
- Finishes: Satin Stainless Steel



Door Stopper with Hook

- Material: Stainless Steel
- Finishes: Satin Stainless Steel



Door Guard

- Material: Zinc Alloy
- Finishes: Satin Nickel



Door Chain

- Material: Steel
- Finishes: Satin Nickel




Door Viewer

- Material: Zinc Alloy
- Finishes: Polish Chrome
- Door Thickness: 35-60mm



Square Bolt

- Material: Stainless Steel
- Finishes: Satin Nickel



Barrel Bolt

- Material: Stainless Steel
- Finishes: Satin Stainless Steel



MEDIUM DUTY DEADBOLT



YED1001 | Single Cylinder Deadbolt with Thumbturn Lock




YED1002 | Double Cylinder Deadbolt with Keyhold

HANDLE SETS



NV/CA5057 Handle Grip Set



6688 Series I Signature Series Tubular Door Handle Set



5050 Series Tubular Set



DH558 I Tubular Double Handle Set (Single Cylinder)

LEVER SET ACCESSORIES

VL5300 SERIES I MEDIUM DUTY TUBULAR LEVERSET



VL5367 I Entrance Function



L5362 I Bathroom Function



VL5377 I Entrance Function



VL5372 I Bathroom Function



VL5387 I Entrance Function



VL5382 I Bathroom Function



VL5397 I Entrance Function



VL5392 I Bathroom Function

DOOR ACCESSORIES



Door Viewer



Foot Bolt



Chain Bolt



Security Door Chain



Door Guard



Hasp and Staple with Lock



Chrome Plated Hasp



Stainless Steel Hasp



Steel Hasp



Keyed Window Lock



Keyed Window Lock



Window Security Bolt



Door Closer



Surface Mounted Door Closer



Standard Screen Door Operators



Heavy Duty Screen Door Operator



Stainless Steel Hinges



Loose-Pin Hinges



Aluminum U Shape Roller Rail Track



Aluminum U Shape Roller Rail Track




Sliding Door Kit



Sliding Door Kit



Face Fix Brackets



Utility Locks



Self-Closing Cabinet Hinge




Ball-Bearing Drawer Runner



Flat Bolt Brass Deadbolt



Spring Latch Brass Deadbolt




Two-Hole Drawer Lock



Smoke Detector

PADLOCKS


ALUMINUM SERIES



LAMINATED PADLOCKS



BRASS PADLOCKS



BRASS PADLOCKS SERIES 140



DIGITAL DOOR LOCKS

RFID DEADLATCH LOCK



RFID MORTISE LOCK



TOUCHSCREEN LEVER LOCK



HEAD OFFICE

Unit 47, L.A. Townhomes, M. Concepcion Avenue,
Brgy. Buting, Pasig City 1600
+63 917 545 1000
+63 2 8293 7000

MAIN WAREHOUSE

Blk 8, Lot 11, Cavite Light Industrial Park,
Brgy. Maguyam, Silang, Cavite 4118
+63 917 637 0275

MANUFACTURING

Blk 3, Lot 10, Cavite Light Industrial Park,
Brgy. Maguyam, Silang, Cavite 4118
+63 917 864 8237
+63 46 481 6499

VISMIN OFFICES & WAREHOUSES

CEBU

Warehouse 9, Purok Molave, Brgy. Tayud,
Liloan, Cebu 6002
+63 917 771 8237
+63 32 344 4456


DAVAO


Purok 26, Caimito St., Ma-a Riverside Road,
Brgy. Ma-a, Davao City 8000
+63 917 621 9264
+63 082 285 7689

CAGAYAN DE ORO

Zone 1, Villarin St., Carmen,
Cagayan de Oro City 9000
+63 917 875 1780
+63 088 856 2291

www.solidforms.com.ph

 **@SFCsolidformscorp**

 **@SFCsolidformscorp**

Copyright 2022 - All rights reserved
May 2022

Vol. 053122

