



GLOBALSOURCE MARKETING CORPORATION



**CREATING SOLUTIONS,
CONNECTING OPPORTUNITIES!**



www.globalsource.com.ph



VISION

We are a top choice business partner of specialized products and logistic services.

MISSION

CUSTOMERS:

We commit a customer-centered approach in delivering quality products and services.

EMPLOYEES:

We continue to empower professionals through learning and development initiatives leading to career advancement.

SHAREHOLDERS:

We gear towards the efficient utilization of company resources to guarantee maximum profitability and continuous business growth.

COMMUNITY:

We promote public awareness in the protection and conservation of our natural resources through our corporate social responsibility programs.

CORE VALUES



Innovation



Service



Excellence



Resiliency



Versatility




Empowerment




TABLE OF CONTENTS

Vision, Mission & Core Values	01
Table of Contents	02
Primary Products	03-19
NATURAL STONES	
Tiles, Granite and Marble	
KEMICALS	
Tile Adhesive, Skim Coat, Cement Remover, Tile Grout, Epoxy, Epoxy Primer and Form Oil	
PIPES & FITTINGS	
uPVC Sanitary Piping System	
uPVC Pipes Electrical Conduit	
uPVC Potable Water Blue Pipe	
uPVC Pressure Line Pipes	
High-Density PolyEthylene Pipes	
Compression Fittings (for PE Pipes)	
PPR Pipes	
uPVC Telecom Pipes	
HDPE Telecom Pipes	
PVC Water Garden Hose	
Flexible Hose	
YALE PRODUCTS	
Digital Door Locks	
Locksets	
Lockset & Door Accessories	
Leverlocks	
HERA BOARD -Fiber Cement Board	
Our Clients	21-22

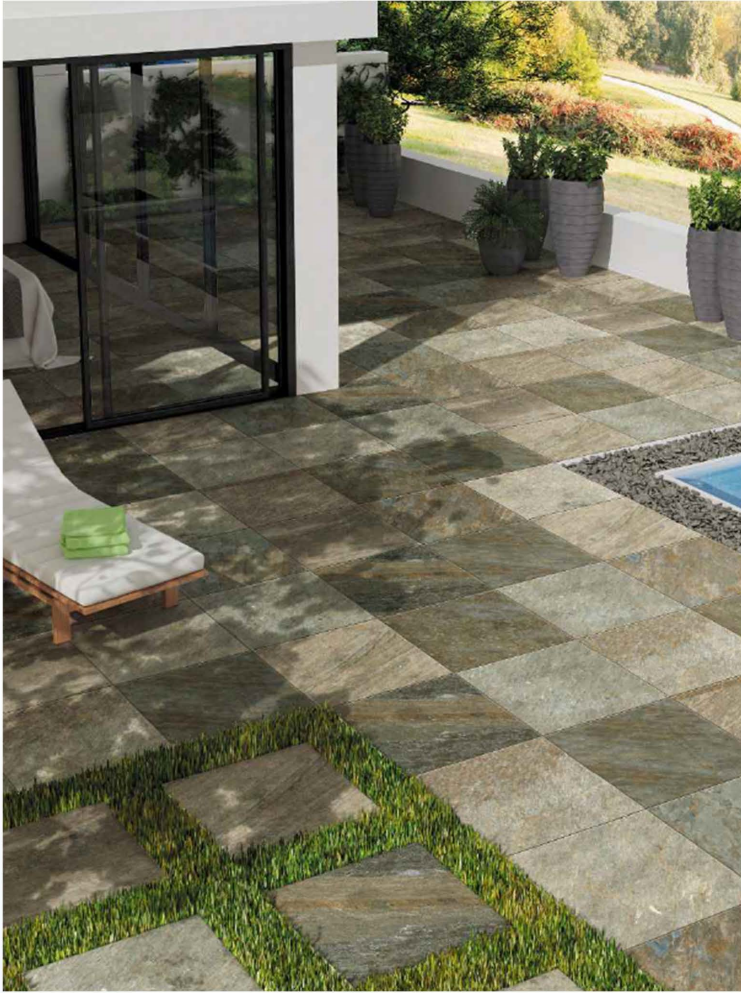

SIZE: 600X600X18mm

MO396018F / Surface: Anti-Slip R10 / Body: Full Body

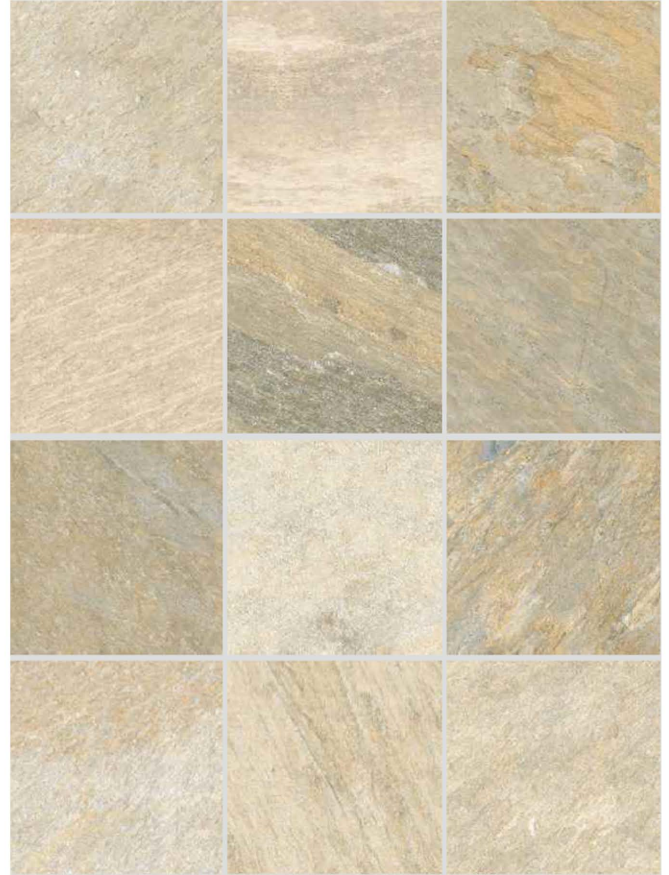

LAPPATO ON STONE TEXTURE & GRITS

SIZE: 600X1200mm




Wall & Floor / TE12917P / 600X1200mm



TILES

SIZE: 600X600mm

MOGNAI GREY



This ceramic tile looks the quality of a material is more dense, shop is pasted in metope, ground, can bring relatively hollowness vision already, the light tonal still can bring relaxed feeling.



MOGNAI CHACOL / Size: 600x600mm



PA66AR02M
Size: 600x600mm



PA66AR03M
Size: 600x600mm



PA66AR05M
Size: 600x600mm



PA66AR06M
Size: 600x600mm



SIZE: 600X600mm/600x1200mm





FLOOR: ME6808 **SIZE: 600X600mm**

MODERN CEMENT BRICK SERIES



FLOOR: ME6801
SIZE: 600X600mm



FLOOR: ME6810
SIZE: 600X600mm



ME6801 ME6802 ME6808 ME6809 ME6810




30X30 Natural Marble



30X30 Natural Marble



30X30 Natural Marble



40x40 Rustic Design



40x40 Rustic Design



40x40 Rustic Design



40x40 Beige Regular Design




40x40 Beige Hi-Gloss Wood Design



40x40 Hi-Gloss Wood design



40x40 Glossy Wood Design



30x30 Floor Tiles



30x30 Glossy Floor Tiles



30x30 Glossy Floor Tiles



40x40 Beige Marble Design



40x40 Blue Marble Design



Packing Crate For Supermarket Window-sill



Supermarket Window-sill



Subway Station Floor Tiles 1000x1000x20mm



Big Slab Workshop



POLISHED





MARBLE



Honey Onyx




Jade Travertine



Lotus White



LIGHT EMPERADOR

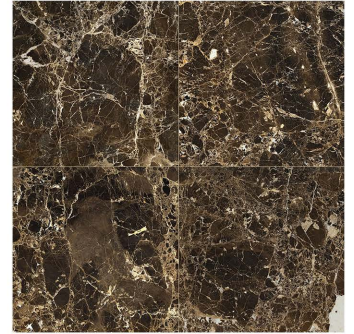


DARK EMPERADOR



Wooden White




Wooden Grey



Tea Rose



Turkey Grey



Angel Beige



Filetto Rossol



Athen Grey



Athen Coffee



Red Alicante



Red Alicante



China Light Emperador




Red Cream



Wooden Grey



Wooden Yellow



Rosso Levanto



Dark Emperador



Cinderella



Grey Travertine



GSMC KEMICALS



STANDARD

TILE ADHESIVE

PRODUCT FEATURES:

1. Achieve cost effective waterproofing with minimal material usage due to thin coating application.
2. Direct mixing with water for easy construction.
3. Can be applied directly onto damp surfaces.
4. The initial setting time suitable for both small scale and large scale operations.
5. Streamline your waterproofing process by simultaneously completing ceramic tile and stone pasting, offering economic benefits.
6. Our product adheres to stringent environmental protection standards.

SKIM COAT

PRODUCT DESCRIPTION:

The product utilizes high-quality stone materials sourced directly from the natural mine site. Through advanced grinding technology, it achieves a uniform fine powder texture and exceptional whiteness. Our production process incorporates an environmentally friendly formula, free from added pests, ensuring a clean and sustainable product while also preventing mold growth with clear take on environmental responsibility.

Furthermore, our product offers outstanding construction performance, exhibiting excellent workability across various water qualities, thereby facilitating efficient and smooth operations, ultimately saving valuable time. Post-application, it boasts a soft gloss finish due to high yield homogeneous paste that eliminates surface crack lines. It ensures strong adhesion, superior crack resistance, exhibiting non-sag properties that provide great workability on overhead and vertical applications.



STANDARD



CEMENT REMOVER

PRODUCT DESCRIPTION:

GSMC CEMENT REMOVER, a cement remover, cleaning and etching agent is a combination of acid based material, corrosion inhibitors and dispensing agent supplied as a green clear solution.



Keep out of reach of child



Wear Mask




USE PROTECTIVE WEAR



STORE IN A COOL DRY PLACE



1 year SHELF LIFE

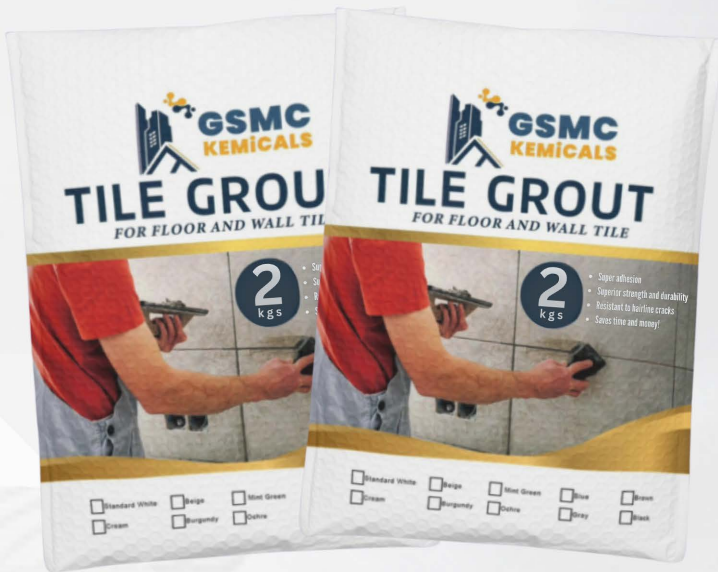

TILE GROUT

PRODUCT DESCRIPTION:

This product is a special kind of ceramic gap filling agent derived from high quality imported raw materials, modified cement, synthetic resins and additives. When added with water, the base surface develops strong cohesion resulting to improved resistance on water permeability and mold growth.

EPOXY PRIMER

A two-component epoxy-based paint specially formulated as primer for interior and exterior galvanized sheets, concrete, iron, and steel surfaces. Possessing a durable and flexible film, it is ideally recommended as undercoat for acrylic lacquers, baking enamels, epoxy enamels nitrocellulose lacquers and any topcoat finish which requires durable priming. Provides good adhesion, abrasion, chemical and corrosion resistance properties.

EPOXY PRIMER

Epoxy Catalyst is a viscous liquid amino polyamide to be used in conjunction with GSMC Epoxy Primer. Also known as component B or hardener, Catalyst has the function of hardening the enamel by means of the heat it provides when mixed with the epoxy primer. It is for this reason that the catalyst is a critical element to achieve the desired result during the glazing of parts and products.



METAL PRIMER

Alkyd primer is used for protection of steel exposed to relatively mild environments. Alkyd paints can only be used above water because its water resistance is poor. It has better UV resistance than epoxy primer.


PIPES

SIZE SPECIFICATIONS



SANITARY UPVC PIPES S-600 SANITARY UPVC PIPES S-1000

2"	3m	2"	3m
3"	3m	3"	3m
4"	3m	4"	3m
6"	3m	6"	3m
		8"	3m

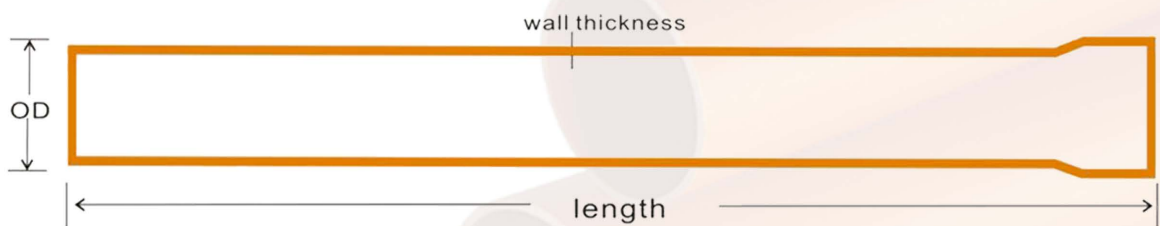

PNS 1950 SANITARY PIPE								
Size (inch)	Series	Tolerance				Length		
		Outside Diameter (mm)	Ovality (mm)	Wall Thickness	Tolerance (mm)	Cutting Length (mm)	Hub Length (mm)	After Hubbing (mm)
2"	1000	57.0 + 0.15	+ 0.8	2.54	+ 0.076	3020	55	3015
3"	1000	82.0 + 0.20	+ 0.9	3.75	+ 0.100	3030	70	3025
4"	1000	107.1 + 0.22	+ 0.14	3.81	+ 0.100	3040	85	3035
6"	1000	160 + 0.40	+ 2.0	4.7	0.117	3050	90	3045
8"	1000	200 + 0.06	+ 2.0	5.4	0.120	3050	90	3045
2"	600	57.0 + 0.15	+ 0.8	1.85	+ 0.055	3020	55	3015
3"	600	82.0 + 0.20	+ 0.9	2.54	+ 0.076	3030	70	3025
4"	600	107.06 + 0.22	+ 0.14	2.54	+ 0.076	3040	85	3035
6"	600	160 + 0.4	+ 2.0	4.0	+ 0.117	3040	85	3045



SIZE SPECIFICATIONS

EXCEL UPVC PIPES S-10

2"	3m
3"	3m
4"	3m
6"	3m
8"	3m

FITTINGS



Elbow 90°



Elbow 45°



Tee



Wye



Clean Out Set



P-Trap w/ Plug



Wye Reducer




Tee Reducer



Coupling




Bushing Reducer

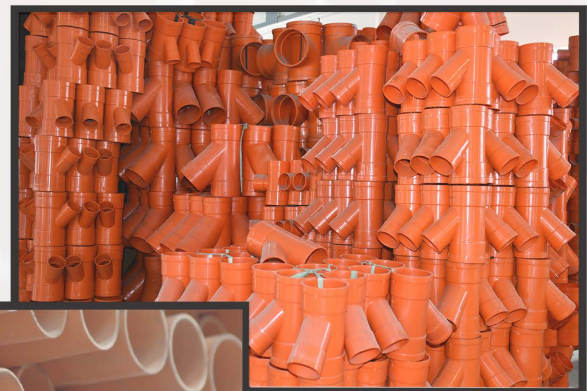

SIZE SPECIFICATIONS

1/2"	(20mm)
3/4"	(25mm)
1"	(32mm)
1-1/4"	(40mm)
1-1/2"	(50mm)
2"	(63mm)

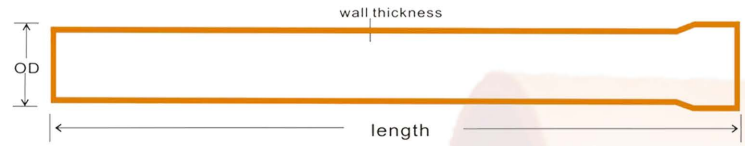

PNS 14 THINWALL							
SIZE (inch)	Tolerance		Wall Thickness		Length		
	Mean Outside Diameter	Max-Min Ovality (mm)	Wall Thickness (mm)	Tolerance (mm)	Cutting Length (mm)	Hub Length (mm)	After Hubbing (mm)
1/2" (20 mm)	+ 0.2 mm	+ 0.5 mm	1.5 mm	+ 0.045 mm	3005	30 mm	3000 mm
3/4" (25 mm)	+ 0.2 mm	+ 0.5 mm	1.5 mm	+ 0.045 mm	3005	30 mm	3000 mm
1" (32 mm)	+ 0.2 mm	+ 0.5 mm	1.5 mm	+ 0.045 mm	3005	35 mm	3000 mm
1 1/4" (40 mm)	+ 0.2 mm	+ 0.5 mm	1.5 mm	+ 0.045 mm	3005	35 mm	3000 mm
1 1/2" (50 mm)	+ 0.2 mm	+ 0.6 mm	1.5 mm	+ 0.045 mm	3005	50 mm	3000 mm
2" (63 mm)	+ 0.2 mm	+ 0.8 mm	1.5 mm	+ 0.045 mm	3005	55 mm	3000 mm

PNS 14 THICKWALL							
SIZE (inch)	Tolerance		Wall Thickness		Length		
	Mean Outside Diameter	Max-Min Ovality (mm)	Wall Thickness (mm)	Tolerance (mm)	Cutting Length (mm)	Hub Length (mm)	After Hubbing (mm)
1/2" (20 mm)	+ 0.2 mm	+ 0.5 mm	2.2 mm	+ 0.045 mm	3005	30 mm	3000 mm
3/4" (25 mm)	+ 0.2 mm	+ 0.5 mm	2.3 mm	+ 0.045 mm	3005	30 mm	3000 mm
1" (32 mm)	+ 0.2 mm	+ 0.5 mm	2.4 mm	+ 0.045 mm	3005	35 mm	3000 mm
1 1/4" (40 mm)	+ 0.2 mm	+ 0.5 mm	2.4 mm	+ 0.045 mm	3005	35 mm	3000 mm
1 1/2" (50 mm)	+ 0.2 mm	+ 0.6 mm	2.4 mm	+ 0.045 mm	3005	50 mm	3000 mm
2" (63 mm)	+ 0.2 mm	+ 0.8 mm	2.5 mm	+ 0.045 mm	3005	55 mm	3000 mm

FITTINGS



Male Adapter with Locknut



Male Adapter




Locknut for Male Adapter



Tee



Coupling



PVC Clamp (Orange & Blue)



Elbow



Long Elbow



Mini Long Elbow



Flexible Connector



Pipe Connector



UPVC POTABLE WATER BLUE PIPE

SIZE SPECIFICATIONS

Size		Inside Diameter	Min. Wall Thickness	Length
(mm)	(in.)	(mm)	(mm)	(m)
20	1/2	17.0	1.8	3
25	3/4	22.0	1.9	3
32	1	29.0	2.0	3
40	1 1/4	37.0	2.30	3
50	1 1/2	47.0	2.90	3
60	2	60.0	3.60	3



UPVC PRESSURE LINE PIPES



UPVC BLUE FITTINGS



FITTINGS



Class 150 (Series 8)

Nom. Pipe Size		Outside Diameter	Min. Wall Thickness	Length
(mm)	(in.)	(mm)	(mm)	(m)
50	2	63	3.60	6
63	2 1/2	75	4.30	6
75	3	90	5.10	6
100	4	110	6.30	6
150	6	160	9.10	6
200	8	225	12.80	6

Class 150 (Series 10)

Nom. Pipe Size		Outside Diameter	Min. Wall Thickness	Length
(mm)	(in.)	(mm)	(mm)	(m)
50	2	63	3.00	6
63	2 1/2	75	3.60	6
75	3	90	4.30	6
100	4	110	5.30	6
150	6	160	7.70	6
200	8	225	10.80	6





HIGH-DENSITY POLYETHYLENE PIPES



SDR 9 (PN16)

Size		Inside Diameter	Min. Wall Thickness	Standard Length
(mm)	(in.)	(mm)	(mm)	(m)
20	1/2	15.56	2.22	300
25	3/4	19.44	2.78	150
32	1	24.89	3.56	100
40	1 1/4	31.11	4.44	60
50	1 1/2	38.89	5.56	60
63	2	49.00	7.00	60
75	2 1/2	58.33	8.33	60
90	3	70.00	10.00	6
110	4	85.56	12.22	6
160	6	124.44	17.78	6
225	8	175.00	25.00	6
280	10	217.78	31.11	6
315	12	245.00	35.00	6
355	14	276.11	39.44	6
400	16	311.11	44.44	6
450	18	350.00	50.00	6
500	20	388.89	55.56	6
560	22	-	-	-
630	24	-	-	-

SDR 11 (PN12.5)

Size		Inside Diameter	Min. Wall Thickness	Standard Length
(mm)	(in.)	(mm)	(mm)	(m)
20	1/2	16.36	1.82	300
25	3/4	20.45	2.27	150
32	1	26.18	2.91	100
40	1 1/4	32.73	3.64	60
50	1 1/2	40.91	4.55	60
63	2	51.11	5.73	60
75	2 1/2	61.36	6.82	60
90	3	73.64	8.18	6
110	4	90.00	10.00	6
160	6	130.91	14.55	6
225	8	184.09	20.45	6
280	10	229.09	25.45	6
315	12	257.73	28.64	6
355	14	290.45	32.27	6
400	16	327.27	36.36	6
450	18	368.18	40.91	6
500	20	409.09	45.45	6
560	22	458.18	50.91	6
630	24	515.45	57.27	6

SDR 13.6 (PN10)

Size		Inside Diameter	Min. Wall Thickness	Standard Length
(mm)	(in.)	(mm)	(mm)	(m)
20	1/2	17.04	1.48	300
25	3/4	21.30	1.85	150
32	1	27.26	2.37	100
40	1 1/4	34.07	2.96	60
50	1 1/2	42.59	3.70	60
63	2	53.67	4.67	60
75	2 1/2	63.89	5.56	60
90	3	76.67	6.67	6
110	4	93.70	8.15	6
160	6	136.30	11.85	6
225	8	191.67	16.67	6
280	10	238.52	20.74	6
315	12	268.33	23.33	6
355	14	302.41	26.30	6
400	16	340.74	29.63	6
450	18	383.33	33.33	6
500	20	425.93	37.04	6
560	22	477.04	41.48	6
630	24	536.67	46.67	6

SDR 17 (PN8)

Size		Inside Diameter	Min. Wall Thickness	Standard Length
(mm)	(in.)	(mm)	(mm)	(m)
20	1/2	17.65	1.18	300
25	3/4	22.06	1.47	150
32	1	28.24	1.88	100
40	1 1/4	35.29	2.35	60
50	1 1/2	44.12	2.94	60
63	2	55.59	3.71	60
75	2 1/2	66.18	4.41	60
90	3	79.41	5.29	6
110	4	97.06	6.47	6
160	6	141.18	9.41	6
225	8	198.53	13.24	6
280	10	247.06	16.47	6
315	12	277.94	18.53	6
355	14	313.24	20.88	6
400	16	352.94	23.53	6
450	18	397.06	26.47	6
500	20	441.12	29.41	6
560	22	494.12	32.94	6
630	24	555.88	55.88	6



COMPRESSION FITTINGS (ISO) FOR PE PIPES



Elbow 90



Coupling



End Plug



Tee 90



Female Adapter



Male Adapter

SIZE	
20 x 20	63 x 63
25 x 25	75 x 75
32 x 32	90 x 90
40 x 40	110 x 110
50 x 50	



Reducing Coupling

SIZE
25 x 20
32 x 20
32 x 25
40 x 25
50 x 25
50 x 32
50 x 40
63 x 25
63 x 32
63 x 40
63 x 50
75 x 50
75 x 63
90 x 63
90 x 75
110 x 90



Reducing Tee

SIZE
25 x 20 x 25
32 x 20 x 32
32 x 25 x 32
40 x 32 x 40
50 x 25 x 50
50 x 32 x 50
50 x 40 x 50
63 x 32 x 63
63 x 40 x 63
63 x 50 x 63




Saddle Clamp

SIZE
25 x 1/2 to 32 x 3/4
40 x 1/2 to 50 x 1
63 x 1/2 to 63 x 1 1/2
75 x 1/2 to 75 x 2
90 x 1/2 to 90 x 2
110 x 1/2 to 110 x 2



PPR PIPES

(Polypropylene Random Copolymer)

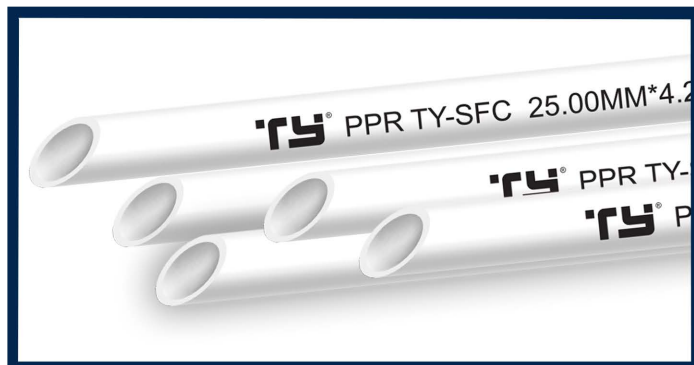

S.NO.	ITEM CODE	SIZE & THICKNESS
1	PP20-4-PN16/G1	20x2.8 mm
2	PP25-4-PN16/G1	25x3.5 mm
3	PP32-4-PN16/G1	32x4.4 mm
4	PP40-4-PN16/G1	40x5.5 mm
5	PP50-4-PN16/G1	50x6.9 mm
6	PP63-4-PN16/G1	63x8.6 mm
7	PP75-4-PN16/G1	75x10.3 mm
8	PP90-4-PN16/G1	90x12.3 mm
9	PP110-4-PN16/G1	110x15.1 mm

ITEM NO.	ITEM CODE	SIZE & THICKNESS
1	PP20-4-PN20/G1	20x3.4 mm
2	PP25-4-PN20/G1	25x4.2 mm
3	PP32-4-PN20/G1	32x5.4 mm
4	PP40-4-PN20/G1	40x6.7 mm
5	PP50-4-PN20/G1	50x8.3 mm
6	PP63-4-PN20/G1	63x10.5 mm
7	PP75-4-PN20/G1	75x12.5 mm
8	PP90-4-PN20/G1	90x15 mm
9	PP110-4-PN20/G1	110x8.3 mm

FITTINGS



Male Transition Socket



Union Female Adaptor



Union Male Adaptor



Reducer Socket



Tee (Equal)



Tee Reducer



Plastic Clamp



Elbow 90°



Elbow 45°



End Plug



Male Transition Elbow 45°



Female Transition Elbow 45°



Ball Valve



Globe Valve w/ Body



Male Transition Tee



Female Transition Tee



Coupling



Female Transition Socket



Plastic Union



End Cap



TELECOM PIPES

Property	Unit	Standard	Typical Value
Tensile strength of compound	Mpa	ASTM D638	27.60
Modulus of elasticity in tension	Mpa	ASTM D638	2,757.90
Flexural Strength	Mpa	ASTM D790	89.60
Deflection temp under load @ 264psi	°F	ASTM D648	128.00
Coefficient of thermal expansion	in/in -°F	ASTM D696	3.0 X 10 ⁻⁶

Note: Value for our Telecom Pipes - D860 400,000 psi modulus of elasticity
Type DB-60 DUCT (for burial or concrete Encasement)



Nominal Size	Thickness	Standard Length	Hub Length
(mm)	(in.)	(m)	(mm)
114.30	4"	6	85



PVC WATER GARDEN HOSE

SIZE	
(in.)	(m)
1/2	90
5/8	90
3/4	60
1	60



HDPE TELECOM PIPES

Nominal Size	Outside Diameter	Wall Thickness	Length
(mm)	(in.)	Min.(mm) Max(mm)	Min.(mm) Max(mm) meters
32	1	32.00 32.3	2.4 2.9 100
40	1 1/4	40.00 40.4	3.0 3.5 60
50	1 1/2	50.00 50.5	3.7 4.3 60

FLEXIBLE HOSE


SIZE	
(in.)	(m)
1/2 x 50	
1/2 x 100	
3/4 x 50	
3/4 x 100	





Yale

YALE YDM3115V SMART LOCK

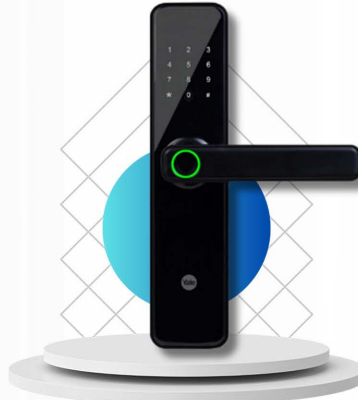

Yale

YALE YDME50NXT SMART LOCK



Yale

YALE YDM7116A SMART LOCK



Yale

YALE KYRA PRO



Yale

YALE YDME200NXT



Yale

Push & Pull Biometric Smart Lock
YMG40



Yale

PUSH & PULL 5 in 1 ACCESS SMART LOCK
YMI70A



Yale

Biometric Smart Lock
YDM4109A



Yale

5-in-1 ACCESS SMART LOCK
YDM7220

LOCKSETS



Yale Entrance Function
VCA 4147 >>>



Yale Bathroom Function
VCA 4142 >>>



Yale Entrance Function
VCA 4447 >>>

LOCKSET & DOOR ACCESSORIES



Yale Material: Zinc Alloy
Finishes: Satin Stainless Steel
Magnetic Door Stopper >>>




Yale Material: Stainless Steel
Finishes: Satin Stainless Steel
Dome Door Stopper >>>



Yale Material: Stainless Steel
Finishes: Satin Stainless Steel
Door Stopper with Hook >>>



Yale Stainless Steel Hinges >>>

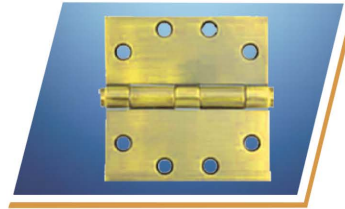

Yale Loose Pin Hinges >>>

LEVERSETS



Yale VL4460 SERIES >>>



Yale VL5310 SERIES >>>



Yale VL6210 SERIES >>>



Yale VL5350 SERIES >>>



Yale VL5380 SERIES >>>



Yale VL5330 SERIES >>>

ADVANTAGES

HERA BOARD is an asbestos free fiber reinforced cement board which is safe for health and environment-friendly. It is lightweight, resistant to humidity and strong.

It is also resistant to fungus and termites that makes maintenance easy and ensures durability of building components.

It has smooth surface finish on both sides that it could be painted directly without having to polish the board first.

Easy to handle and apply, translating to savings during installation.

HERA BOARD has passed the following test:

- a.) **Fire Resistant**, based on the result of the test SNI 1741-2008, September 8th 2015
- b.) **Sound Insulation**, Puslitbangkim
- c.) **Non Asbestos** (Report Number: 321/KS/PNBP/X/2015) from the Indonesian Institute of Sciences.

PRODUCT INFORMATION

A. The Features and benefits of HERA BOARD

HERA BOARD is a versatile product that is highly recommended for any residential, commercial, institutional, and industrial applications not exposed to weather such as interior wall partitions, interior ceilings and roof eaves. With an incredibly smooth surface on both sides, lightweight, resistant to humidity and strong, finishing is with ease.

Hera Board, Your Smart Choice!

B. Size and Application

Size (mm) T x W x L	Weight (kg)	Application
3.5 x 1220 x 2440 mm	17	Ceiling
4.5 x 1220 x 2440 mm	21.5	Ceiling/Partition
6 x 1220 x 2440 / 3000 mm	28/34	Ceiling/Partition



FIBER CEMENT BOARD



FIBER CEMENT BOARD



OUR CLIENTS

FILINVEST
LAND, INCORPORATED

VISTA LAND



OVIALAND



Ecoverde Homes

Realizing Dreams, Enriching Lives



ASIA LANDBEST
PROPERTIES, INC.



CALMARLAND



ACASYS
DEVELOPMENT CORPORATION



HAUMARU HOUSING

Communities for older people



OUR CLIENTS



COTTA BUILDERS
CONSTRUCTION & DEVELOPMENT CORP.



GLOBALSOURCE MARKETING CORPORATION

HEAD OFFICE ADDRESS

G/F Yupangco Building #1606 Trade Street
Corner Investment Drive, Madrigal Business Park
Alabang, Muntinlupa City

+63 917 545-1000 / +63 2 8293-7000

BRANCHES

ILOILO

Aleoson Road, Brgy. Jibao-an
Pavia, 5001 Iloilo
+63 917 132-8236

PAMPANGA

Warehouse 10, situated in Calulut-
Panipuan Road, Mexico, 2021 Pampanga
+63 917 711-2330

 sales@globalsource.com.ph

 [gsmc.ph](https://www.facebook.com/gsmc.ph)